

Buffet Server Instruction Manual

Model 6264



Coopers
OF STORTFORD
www.coopersofstortford.co.uk

OWNER'S MANUAL

MODEL 6264

CAUTION:

Before using the buffet server, read the manual fully and follow all safety and operating instructions. Keep these instructions for future reference.

PREPARING YOUR BUFFET SERVER FOR USE

IMPORTANT SAFETY TIPS

This item gets hot, never attempt to move the server when in operation with hot food or liquids.

Do not use in a bathroom, or any other room where there is a risk the unit may get wet.

Do not leave the server unattended at any time when in use.

Do not let children operate the server, or leave it in use where children are unattended.

Do not cover the server when in use.

Do not use the server with an extension socket or automatic timer.

Do not touch the metal parts when it is operation.

Use only in a well-ventilated room; place the server at least 10cm away from any other object or material.

Do not use if the unit, cable or plug is damaged in any way, return to your supplier for repair/replacement as necessary.

Disconnect from the wall socket before cleaning with a soft cloth. Never use a scourer pad.

Always place the unit on a flat stable surface.

For indoor use only.

After use, pull the plug from the wall socket.

Should the fuse need to be replaced, only replace with a BS1362 13amp rated fuse.

Caution – Improper use of the grounded plug can result in the risk of electrical shock. Do not use the unit if the power cord is damaged.

1. This unit should be properly grounded for your safety. The power cord of this appliance is equipped with a BS 3 pin plug with 13-amp fuse.
2. Plug your appliance into a, properly installed, grounded wall socket. Do not under any circumstances; alter the plug or cable of the server.

OPERATING PROCEDURES & MAINTENANCE

UNPACKING YOUR SERVER

1. Remove the exterior and interior packaging. Check that there is no damage to the outer case.
2. Wipe the main unit with a damp soft cloth, never immerse in water. Clean the trays and lids with hot soapy water, dry with a soft cloth.
3. Find a suitable location for your server that is protected from direct sunlight and other sources of heat (i.e.: stove, furnace, or radiator). Place the server on a stable and level surface. Make sure that there is at least 10cm of space between the back and sides of your server and the wall or any other object.
4. The appliance must be positioned so that the plug is accessible.

USE

BUFFET SERVER

1. Assemble the buffet server.
2. Plug into wall socket.
3. Adjust temperature control to desired heat, 105-185° F
4. The food trays will keep food hot for a long period of time, however over an extended period of time the food will start to dry out.
5. When finished, unplug from wall socket.
6. Do not leave food in the trays after use, however it is better to allow the unit to cool before removing parts to clean.

WARMING TRAY

1. Remove the steel frame, 3 trays and plastic lids
2. Plug into wall socket
3. Select desired temperature.
4. Carefully put your plates or heatproof serving dishes, foil takeaway containers onto the surface of the warming tray.
5. The warming tray will keep food hot for a long period of time, however over an extended period of time the food will start to dry out.
6. When finished, unplug from wall socket.

PACKAGING

Dispose of the packaging at your local recycling centre.

Dispose of paper and carton separately from plastic bags at your local recycling centre.

Dispose of the appliance at the end of its lifespan at your local authorised household waste recycling centre.

U.K. WIRING INSTRUCTIONS


The wires in the mains lead are coloured in accordance with the following code:

BLUE	NEUTRAL
BROWN	LIVE
GREEN/YELLOW	EARTH

As the colours of the wire in the mains lead of this appliance may not correspond with the colour markings identifying the terminals on your plug, proceed as follows:

- The wire which is coloured BLUE must be connected to the terminal which is marked with the letter N or coloured black.
- The wire which is coloured BROWN must be connected to the terminal which is marked with the letter L or coloured red.
- The wire which is coloured GREEN/YELLOW must be connected to the terminal which is marked with the letter E or (earth symbol) and is coloured GREEN or GREEN/YELLOW.

WARNING: THIS APPLIANCE MUST BE EARTHED

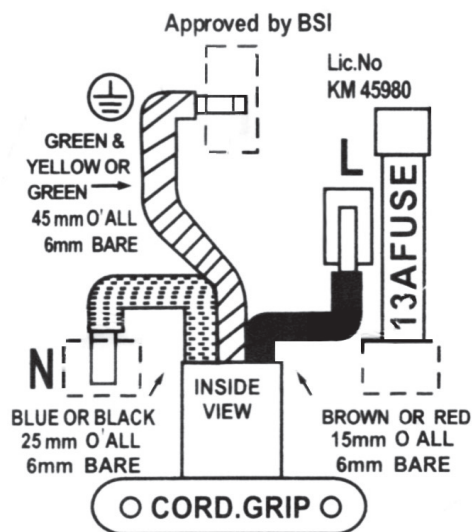

Coopers
OF STORTFORD
www.coopersofstortford.co.uk